


# ELECTRIC CONTROL PANELS

## DFFRP RANGE (REMOTE CONTROL UNIT FOR MANNED PLACE)

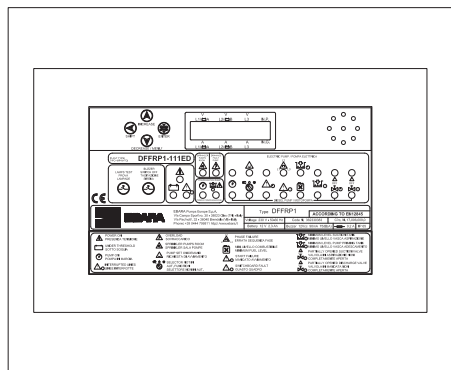

Digital remote control unit control panels for monitoring the alarms in the manned place to be connected to the FFP control panels and the solenoid valves of the fire-fighting unit.

Manages the alarms coming from two main pumps (electric and/or diesel) at the same time, plus the jockey pump.

### FUNCTIONS

The control unit displays, controls and signals the alarms deriving from the fire-fighting unit on a display.

It is complete with battery that has capacity up to 20 hours in order to keep the signals active also in the event of a power cut.

Contacts are available to indicate the alarms at a distance, to take the same onto a local or remote PC and for the connection to GSM module (optional).

Communication with the control panels can be analogue (via cable connection) or digital via RS 485 connection.

### TECHNICAL DATA

- Power supply: 230  $\pm$ 10% - 50/60 Hz
- Temperature limits: -10°C +40°C
- IP55 Protection rating
- Sound power level: 75 dB A
- Reference Standards: EN 60204-1, EN 60439-1, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 60529, EN 12845