

D-TANK 200 (E) AND 600 (E)

WASTEWATER COLLECTION TANKS

Wastewater collection tanks of robust construction and easy installation.

TECHNICAL DETAILS

- Sturdy construction
- Easy installation
- Equipped with rapid flow elbow

TECHNICAL DATA

• For D-TANK 200 and D-TANK 200 E

Tank made of polyethylene, capacity 200 liters housing 1 pump, inclusive of one cover with expanded EPDM seal and AISI304 stainless steel nuts and bolts

• For D-TANK 600 and D-TANK 600 E

Tank made of polyethylene, capacity 600 liters housing 2 pumps, inclusive of two covers with expanded EPDM seal and AISI304 stainless steel nuts and bolts

D-TANK 200

- INLET: DN 110 with seal
- OUTLET: DN 63 with seal
- VENTILATION: DN 63 with seal
- POWER SUPPLY: 4 x M20 cable glands + 3 closing caps
- Ø 2" x 63 mm PVC flow pipe, equipped with a 3 piece coupling for disassembly, vertical outlet with elbow
- 2 ball cock cable clamps
- Max weight: 40kg
- For grinder 2" D-TANK flange must be used
- Optional adaptor 1,5"/2" (for additional information please contact our sales network)

D-TANK 200 E

- INLET: DN 110 with seal
- OUTLET: DN 63 with seal
- VENTILATION: DN 63 with seal
- POWER SUPPLY: 4 x M20 cable glands + 3 closing caps
- Ø 2" x 63 mm PVC flow pipe, vertical outlet with elbow
- 2 ball cock cable clamps
- Max weight: 40kg
- For grinder 2" D-TANK flange must be used
- Optional adaptor 1,5"/2" (for additional information please contact our sales network)
- Installation of 1 duckfoot bend with application of guide bars + AISI 304 steel plate for fixing bend with 4 fixing screws equipped with seals and brass nuts

D-TANK 600

- INLET: DN 110 with seal
- OUTLET: DN 63 with seal
- VENTILATION: DN 63 with seal
- POWER SUPPLY: 6 x M20 cable glands + 4 closing caps
- Ø 2" x 63 mm PVC flow pipe, equipped with a 3 piece coupling for disassembly, vertical outlet with elbow
- 3 ball cock cable clamps
- Max weight: 60kg
- From 40kg use the optional plate "D-TANK" (60kg max) (contact our sales network)
- For grinder 2" D-TANK flange must be used

D-TANK 600 E

- INLET: DN 110 with seal
- OUTLET: DN 63 with seal
- VENTILATION: DN 63 with seal
- POWER SUPPLY: 6x M20 cable glands + 4 closing caps
- Ø 2" x 63 mm PVC flow pipe, vertical outlet with elbow
- 3 ball cock cable clamps
- Max weight: 60kg
- From 40kg use the optional plate "D-TANK" (60kg max) (contact our sales network)
- For grinder 2" D-TANK flange must be used
- Installation of 2 duckfoot bends with application of guide bars + AISI 304 steel plate for fixing bend with 8 fixing screws equipped with seals and brass nuts

Note: for all D-TANK models

For buried installation 90% sand 10% cement (if not installed in cement housing)

D-TANK 200



D-TANK 600



D-TANK
basic version







D-TANK "E"
equipped version

D-TANK 200 (E) AND 600 (E)

WASTEWATER COLLECTION TANKS

DIMENSIONS

Model	Weight [kg]
D-TANK 200	13
D-TANK 200 E	23

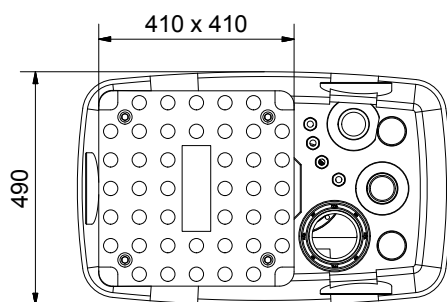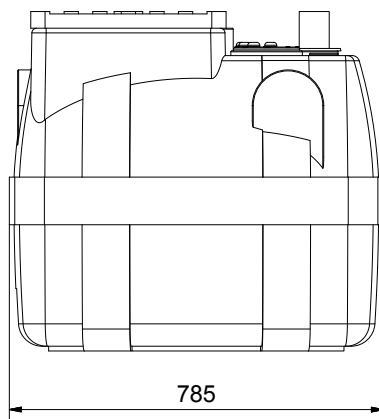

Model	Weight [kg]
D-TANK 600	33
D-TANK 600 E	53

